E N G L I S H





Dear Customer,

the outcome of a recent survey has stood out a customer satisfaction level of 92,8%.

This trustworthy and positive result is the effect of the commitment of all the collaborators and employees, which we aim to maintain and improve. It is the successful completion of the targets defined by the company management, which are included in the "Group Mission" too:

"To develop, manufacture and offer door locking systems, integrating security, user-friendliness, compliance with standards and technical specifications drawn up by designers and installers.

To provide our distribution network with the necessary technical and sales support."

Our mission translate into the following values within the System:

- The respect of our world: Ethics, Environment, Safety, Quality, and Privacy;
- · Product reliability;
- Endless innovation;
- · Respecting our partners' and customers' interests.

The fulfillment of these values allows to improve and implement our Integrated Management System, whose strategic aim and daily effort is the achievement of the following System Certifications and all the necessary product certifications by all the companies of ISEO Group.





Occupational Health and Safety Management System



Locks for wooden frames



Infilare 291 e.g. code 2911*-2912*	3 -5	Furniture locks	3 -26
		e.g. code 100*-102*-106*-107*	
Infilare 200N e.g. code 200N*-210N*-280N*	3 -9	Mortice locks	3 -31
		e.g. code 1301*-1321*	
2001 e.g. code 5210*-5211*-5213*-5310*-5312*	3 -15	Mortice locks with cylinder e.g. code 463*-316*	3 -35
Elettrica 500 e.g. code 5115*-5116*-5117*-5118*	3 -18	Sbarra e.g. code 904*	3 -38
Portoncino e.g. code 401*-411*-421*-431*	3 -19	Perfecta e.g. code 911*-913*-915*	3 -41
Ferroglietto e.g. code 300*-310*-320*-330*-340*-350*	3 -23	Vis e.g. code 9102*-9103*-9104*	3 -47
Verrou e.g. code 460*-470*	3 -25		

Locks for wooden frames

Infilare 291










The mortice lock series 291 has obtained the product certification **038BE/1** (except for the version with roller and deadbolt only) and the certificate of conformity **CE 2193.** It is available in different finishings and locking versions. In conjunction with ISEO cylinders it provides high security to the doors.

Main features:

- steel closed lockcase on all sides: this prevents profile machining chips from entering the mechanism;
- two throws standard deadbolt or two throws anti-break and anti-saw deadbolt;
- reversible latchbolt or roller;
- center distance mm 85;
- 6 fixing holes for escutcheon and security plates;
- front plate rounded or squared mm 22, in: 24 KT gold plated brass, polished and painted brass, chrome-plated and polished brass, nickel-plated satin brass, bronze-plated and brushes brass;
- front plate rounded or squared mm 24, in stainless steel;
- operating with European profile cylinder.

All the updated certificates can be downloaded from our web site: $\ensuremath{\mathsf{www}}. \ensuremath{\mathsf{iseoserrature}}. \ensuremath{\mathsf{it}}$



Closed lockcase and fixing holes




Anti-drill and anti-saw deadbolt









Cylinder to be ordered separately


CLOSED-CASE mortice lock operating with European profile cylinder.

Two mm 10 throws. Reversible latchbolt. Handle follower mm 8.

Center distance mm 85. 6 fixing holes for escutcheons and security plates. Striking plate. Fixing screws.

Front plate mm 22 = 0 Front plate mm 24 (only for INOX front plate) = 4 Backset= mm 40 45 Front plate 24 KT GOLD PLATED brass, 22 mm square edge = A50 Front plate polished and painted brass, 22 mm square edge = L 55 Front plate chrome-plated and polished brass, 22 mm square edge = K60 Front plate nickel-plated satin brass, 22 mm square edge = N70 Front plate bronze-plated and brushed brass, 22 mm square edge = **B** Front plate stainless steel, 22/24 mm square edge = 2 Front plate stainless steel, 22/24 mm square edge, packed in nylon bags with 25 pieces each = 2N





Cylinder to be ordered separately

CLOSED-CASE mortice lock operating with European profile cylinder. Two mm 10 throws. Reversible latchbolt. Handle follower mm 8. Center distance mm 85. 6 fixing holes for escutcheons and security plates. Striking plate. Fixing screws.

Front plate 24 KT GOLD PLATED brass, 22 mm round edge	= A
Front plate polished and painted brass, 22 mm round edge	= L
Front plate chrome-plated and polished brass, 22 mm round edge	= K
Front plate nickel-plated satin brass, 22 mm round edge	= N
Front plate bronze-plated and brushed brass, 22 mm round edge	= B
Front plate stainless steel, 22 mm round edge	= 2
Front plate stainless steel, 22 mm round edge,	
packed in nylon bags with 25 pieces each	= 2N

Seysully Solution State State

Front plate

Code: 2911 X 5 XX


REQUESTS FOR ANY FINISHES OR BACKSETS WILL BE ANALYZED DEPENDING ON THE QUANTITY REQUESTED.







Cylinder to be ordered separately



CLOSED-CASE mortice lock operating with European profile cylinder.

Two mm 10 throws. Adjustable roller.

6 fixing holes for escutcheons and security plates.


Striking plate. Fixing screws.

Backset	
Code: 2912 05 XX X	
Backset= mm 40	
45	
50	
55	
60	
70	

Front plate 24 KT GOLD PLATED brass, 22 mm square edge	= A
Front plate polished and painted brass, 22 mm square edge	= L
Front plate chrome-plated and polished brass, 22 mm square edge	= K
Front plate nickel-plated satin brass, 22 mm square edge	= N
Front plate bronze-plated and brushed brass, 22 mm square edge	= B



Cylinder to be ordered separately



 $\label{local_constraint} \textbf{CLOSED-CASE} \ \ \text{mortice lock operating with European profile cylinder}.$

Two mm 10 throws.

 $\label{eq:continuous} \mbox{ Adjustable roller. 6 fixing holes for escutcheons and security plates.} \\ \mbox{ Striking plate. Fixing screws.}$

		Backset= mm 40
		45
Front plate 24 KT GOLD PLATED brass, 22 mm round edge	= A	50
Front plate polished and painted brass, 22 mm round edge	= L	55
Front plate chrome-plated and polished brass, 22 mm round edge	= K	60
Front plate nickel-plated satin brass, 22 mm round edge	= N	70
Front plate bronze-plated and brushed brass, 22 mm round edge	= B ◀	10

REQUESTS FOR ANY FINISHES OR BACKSETS WILL BE ANALYZED DEPENDING ON THE QUANTITY REQUESTED.

Backset Finishes


Code: 2912 15 XX X







Cylinder to be ordered separately




CLOSED-CASE mortice lock operating with European profile cylinder.

ANTI-SAW AND ANTI-BREAK DEADBOLT.


Two mm 10,4 throws. Reversible latchbolt. Handle follower mm 8. Center distance mm 85. 6 fixing holes for escutcheons and security plates. Striking plate. Fixing screws.

Front plate 24 KT GOLD PLATED brass, 22 mm square edge	= A
Front plate polished and painted brass, 22 mm square edge	= L
Front plate chrome-plated and polished brass, 22 mm square edge	= K
Front plate nickel-plated satin brass, 22 mm square edge	= N
Front plate bronze-plated and brushed brass, 22 mm square edge	= B
Front plate stainless steel, 22 mm square edge	= 2
Front plate stainless steel, 22 mm square edge,	
packed in nylon bags with 25 pieces each	= 2N





Cylinder to be ordered separately



 $\label{local_constraint} \textbf{CLOSED-CASE} \ \ \text{mortice lock operating with European profile cylinder}.$

ANTI-SAW AND ANTI-BREAK DEADBOLT.

Two mm 10,4 throws. Reversible latchbolt. Handle follower mm 8. Center distance mm 85. 6 fixing holes for escutcheons and security plates. Striking plate. Fixing screws.

Front plate 24 KT GOLD PLATED brass, 22 mm round edge	= A
Front plate polished and painted brass, 22 mm round edge	= L
Front plate chrome-plated and polished brass, 22 mm round edge	= K
Front plate nickel-plated satin brass, 22 mm round edge	= N
Front plate bronze-plated and brushed brass, 22 mm round edge	= B
Front plate stainless steel, 22 mm round edge	= 2
Front plate stainless steel, 22 mm round edge,	
packed in nylon bags with 25 pieces each	= 2N

REQUESTS FOR ANY FINISHES OR BACKSETS WILL BE ANALYZED DEPENDING ON THE QUANTITY REQUESTED.



Infilare 200N



The mortice lock series 200N has obtained the product certification **102BE/0** in compliance with the standard **UNI EN 12209:05.**

The mortice locks series 200N are available in different finishes and locking versions. In conjunction with ISEO cylinders they provide different levels of security to the doors.



200N series main features:

- Painted steel lockcase closed on all sides: this prevents profile machining chips from entering the mechanism.
- 6 fixing holes for escutcheons and security plates.
- Reversible latchbolt or roller.
- Deadbolt 20 mm, 2 throws.
- Operating with European profile cylinder or double handle follower (service doors).
- Latchbolt operated by handle and key.
- Center distance mm 85.
- Handle follower mm 8.
- Backset 40, 45, 50, 60, 70 mm.
- Front plate rounded or squared mm 22.

Front plate finishes:

- Gold-plated steel
- Brass-plated steel
- Chrome-plated steel
- Stainless steel

200N series main features backset 25, 30, 35:

- Painted steel lockcase closed on all sides: this prevents profile machining chips from entering the mechanism.
- Reversible latchbolt.
- Deadbolt 15 mm, 1 throws.
- 2 fixing holes 21,5 mm below and 46 mm above from the handle.
- Operating with European profile cylinder.
- Latchbolt operated by handle and key.
- Center distance mm 85.
- Handle follower mm 8.
- Backset 26, 31, 36 mm.
- Front plate rounded or squared mm 22.

Front plate finishes:

- Brass-plated steel
- Gold-plated steel on request






Min. ord
Multiple
package
Single
package

Infilare 200N



Cylinder and striking plate to be ordered separately



CLOSED-CASE mortice lock with LATCHBOLT and DEADBOLT, operating with European profile cylinder.

Two mm 10 throws. Reversible latchbolt.

Handle follower mm 8. Center distance mm 85.

6 fixing holes for escutcheons and security plates.

2 escutcheons. Fixing screws.

BRASS-PLATED STEEL FRONT PLATE. SQUARE EDGE

Backset mm 45 200N451 1 10 10 Backset mm 50 200N501 1 10 10 Backset mm 60 200N601 1 10 10 STAINLESS STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N402 1 10 10 Backset mm 45 200N452 1 10 10 Backset mm 50 200N502 1 10 10 Backset mm 60 200N602 1 10 10 CHROME-PLATED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N403 1 10 10 Backset mm 45 200N453 1 10 10 Backset mm 60 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 40 200N703 1 10 10 Backset mm 40 200N703 1 10 10 Backset mm 45 200N406 1 10 10 Backset mm 45 200N406	Backset mm 40	200N401	1	10	10
Backset mm 60 200N601 1 10 10 Backset mm 70 200N701 1 10 10 STAINLESS STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N402 1 10 10 Backset mm 45 200N452 1 10 10 Backset mm 50 200N502 1 10 10 Backset mm 60 200N602 1 10 10 Backset mm 70 200N702 1 10 10 CHROME-PLATED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N403 1 10 10 Backset mm 50 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 70 200N603 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 40 200N406 1 10 10	Backset mm 45	200N451	1	10	10
Backset mm 70 200N701	Backset mm 50	200N501	1	10	10
STAINLESS STEEL FRONT PLATE. SQUARE EDGE	Backset mm 60	200N601	1	10	10
Backset mm 40 200N402 1 10 10 Backset mm 45 200N452 1 10 10 Backset mm 50 200N502 1 10 10 Backset mm 60 200N602 1 10 10 Backset mm 70 200N702 1 10 10 CHROME-PLATED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N403 1 10 10 Backset mm 45 200N453 1 10 10 Backset mm 60 200N503 1 10 10 Backset mm 70 200N703 1 10 10 GOLP-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 60 200N506 1 10 10 Backset mm 60 200N606 1 10 1	Backset mm 70	200N701	1	10	10
Backset mm 45 200N452 1 10 10	STAINLESS STEEL FRONT PLATE. SQUARE EDGE				
Backset mm 50 200N502 1 10 10	Backset mm 40	200N402	1	10	10
Backset mm 60 200N602 1 10 10 Backset mm 70 200N702 1 10 10 CHROME-PLATED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N403 1 10 10 Backset mm 45 200N453 1 10 10 Backset mm 50 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 45	200N452	1	10	10
Backset mm 70 200N702 1 10 10	Backset mm 50	200N502	1	10	10
CHROME-PLATED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N403 1 10 10 Backset mm 45 200N453 1 10 10 Backset mm 50 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 60	200N602	1	10	10
Backset mm 40 200N403 1 10 10 Backset mm 45 200N453 1 10 10 Backset mm 50 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 70	200N702	1	10	10
Backset mm 50 200N503 1 10 10 Backset mm 60 200N603 1 10 10 Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10					
Backset mm 60 200N603 1 10 10 Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10		200N403	1	10	10
Backset mm 70 200N703 1 10 10 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45	200N453			10
GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45	200N453	1	10	10
Backset mm 40 200N406 1 10 10 Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45 Backset mm 50	200N453 200N503	1	10 10	10 10
Backset mm 45 200N456 1 10 10 Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60	200N453 200N503 200N603	1 1 1	10 10 10	10 10 10
Backset mm 50 200N506 1 10 10 Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60 Backset mm 70	200N453 200N503 200N603	1 1 1	10 10 10	10 10 10
Backset mm 60 200N606 1 10 10	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60 Backset mm 70 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE	200N453 200N503 200N603 200N703	1 1 1	10 10 10 10	10 10 10 10
	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60 Backset mm 70 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40	200N453 200N503 200N603 200N703	1 1 1 1 1	10 10 10 10	10 10 10 10 10
Backset mm 70 200N706 1 10	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60 Backset mm 70 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 Backset mm 45	200N453 200N503 200N603 200N703 200N406 200N456	1 1 1 1 1 1	10 10 10 10 10	10 10 10 10 10
	Backset mm 40 Backset mm 45 Backset mm 50 Backset mm 60 Backset mm 70 GOLD-PAINTED STEEL FRONT PLATE. SQUARE EDGE Backset mm 40 Backset mm 45 Backset mm 50	200N453 200N503 200N603 200N703 200N406 200N456 200N506	1 1 1 1 1 1 1	10 10 10 10 10 10	10 10 10 10 10 10




Min. ord Multiple package Single package

Infilare 200N



Cylinder and striking plate to be ordered separately



CLOSED-CASE mortice lock with LATCHBOLT and DEADBOLT, operating with European profile cylinder.

Two mm 10 throws. Reversible latchbolt.

Handle follower mm 8. Center distance mm 85.

6 fixing holes for escutcheons and security plates.

2 escutcheons. Fixing screws.

BRASS-PLATED STEEL FRONT PLATE. ROUND EDGE

BRASS-PLATED STEEL FRONT PLATE. ROUND EDGE				
Backset mm 40	210N401	1	10	10
Backset mm 45	210N451	1	10	10
Backset mm 50	210N501	1	10	10
Backset mm 60	210N601	1	10	10
Backset mm 70	210N701	1	10	10
STAINLESS STEEL FRONT PLATE. ROUND EDGE				
Backset mm 40	210N402	1	10	10
Backset mm 45	210N452	1	10	10
Backset mm 50	210N502	1	10	10
Backset mm 60	210N602	1	10	10
Backset mm 70	210N702	1	10	10
CHROME-PLATED STEEL FRONT PLATE. ROUND EDGE				
Backset mm 40	210N403	1	10	10
Backset mm 45	210N453	1	10	10
Backset mm 50	210N503	1	10	10
Backset mm 60	210N603	1	10	10
Backset mm 70	210N703	1	10	10
GOLD-PAINTED STEEL FRONT PLATE. ROUND EDGE				
Backset mm 40	210N406	1	10	10
Backset mm 45	210N456	1	10	10
Backset mm 50	210N506	1	10	10
Backset mm 60	210N606	1	10	10
Backset mm 70	210N706	1	10	10
Deconoct Hill To				




Multiple package Single package

Infilare 200N



Cylinder and striking plate to be ordered separately



CLOSED-CASE mortice lock with ROLLER and DEADBOLT, operating with European profile cylinder. **BRASS-PLATED STEEL FRONT PLATE. SQUARE EDGE.**

Two mm 10 throws. 6 fixing holes for escutcheons and security plates.


Adjustable roller. 2 escutcheons. Fixing screws.

Backset mm 40	280N401	1	10	10
Backset mm 45	280N451	1	10	10
Backset mm 50	280N501	1	10	10

Version with cylinder on request



Striking plate to be ordered separately



CLOSED-CASE mortice lock with LATCHBOLT and DEADBOLT, operating with DOUBLE HANDLE FOLLOWER 8 mm for locked and unlocked function.

BRASS-PLATED STEEL FRONT PLATE. SQUARE EDGE.

Two mm 10 throws. 6 fixing holes for escutcheons and security plates.

Reversible latchbolt. 2 escutcheons. Fixing screws.

Backset mm 40	221N401	1	10	10
Backset mm 45	221N451	1	10	10
Backset mm 50	221N501	1	10	10




Multiple package Single package

Infilare 200N



Cylinder and striking plate to be ordered separately



CLOSED-CASE mortice lock with latchbolt and deadbolt, operating with European profile cylinder.

BRASS-PLATED STEEL FRONT PLATE with SQUARE EDGE. One mm 15 throws.

Reversible latchbolt. Latchlocking by key or HANDLE.


Center distance 85 mm. Handle follower mm 8. 2 escutcheons. Fixing screws.

Backset mm 26	200N251	1	10	10
Backset mm 31	200N301	1	10	10
Backset mm 36	200N351	1	10	10

Version with cylinder or gold-painted finish on request



Cylinder and striking plate to be ordered separately



CLOSED-CASE mortice lock with latchbolt and deadbolt, operating with European profile cylinder.

BRASS-PLATED STEEL FRONT PLATE with ROUND EDGE. One mm 15 throws.

Reversible latchbolt. Latchlocking by key or HANDLE.

Center distance 85 mm. Handle follower mm 8. 2 escutcheons. Fixing screws.

Backset mm 26	210N251	1	10	10
Backset mm 31	210N301	1	10	10
Backset mm 36	210N351	1	10	10

Version with cylinder or gold-painted finish on request




Min. ord Multiple package Single package

Infilare 200



Cylinder and striking plate to be ordered separately



Open-case mortice lock operating with European profile cylinder.

BRASS-PLATED STEEL FRONT PLATE with SQUARE EDGE. Two mm 10 throws.

Version with deadbolt only. 2 escutcheons. Fixing screws.

Backset mm 35	201351	1	10	10
Backset mm 40	201401	1	10	10
Backset mm 45	201451	1	10	10
Backset mm 50	201501	1	10	10
Backset mm 60	201601	1	10	10

Version with cylinder on request





Min. ord
Multiple
package
Single
package

2001











nk

Electric rim lock, painted, RIGHT-HAND. 12Vac 15W. Internal cylinder

and external detached cylinder. Self-locking latchbolt. Detached self-loading spring with adjustable force.

3 KEYS. Adjustable keep with blade. Instructions sheets. Fixing screws.

Backset mm 50	521010505	1	6	6
Backset mm 60	521010605	1	6	6
Backset mm 70	521010705	1	6	6
Backset mm 80	521010805	1	6	6

Electric rim lock, painted, LEFT-HAND. 12Vac 15W. Internal cylinder


and external detached cylinder. Self-locking latchbolt. Detached self-loading spring with adjustable force.


3 KEYS. Adjustable keep with blade. Instructions sheets. Fixing screws.

	•	- C					
E	Backset mm 50		521020505	1	6	6	
E	Backset mm 60		521020605	1	6	6	
E	Backset mm 70		521020705	1	6	6	
E	Backset mm 80		521020805	1	6	6	









Key blank 020259

Electric rim lock, painted, RIGHT-HAND. 12Vac 15W. Internal pushbutton and

detached external cylinder. Self-locking latchbolt. Detached self-loading spring with adjustable force.

3 KEYS. Adjustable keep with blade. Instructions sheet. Fixing screws.

,	· ·					
Backset mm 50		521110505	1	6	6	
Backset mm 60		521110605	1	6	6	
Backset mm 70		521110705	1	6	6	
Backset mm 80		521110805	1	6	6	

Electric rim lock, painted, LEFT-HAND. 12Vac 15W. Internal pushbutton and

detached external cylinder. Self-locking latchbolt. Detached self-loading spring with adjustable force.

3 KEYS. Adjustable keep with blade. Instructions sheet. Fixing screws.

The state of the s				
Backset mm 50	521120505	1	6	6
Backset mm 60	521120605	1	6	6
Backset mm 70	521120705	1	6	6
Backset mm 80	521120805	1	6	6





Min. ord
Multiple
package
Single
package

2001











Electric rim lock, painted, RIGTH-HAND. 12Vac 15W. Internal pushbutton, internal cylinder

for ${\bf PUSHBUTTON\ LOCKING}$ or ${\bf HOLD\text{-}OPEN}$ function, and external detached cylinder.

Self-locking latchbolt. Detached self-loading spring with adjustable force. 3 KEYS.

Adjustable keep with blade. Instructions sheet. Fixing screws.

Backset mm 50	521310505	1	6	6
Backset mm 60	521310605	1	6	6
Backset mm 70	521310705	1	6	6
Backset mm 80	521310805	1	6	6

Electric rim lock, painted, LEFT-HAND. 12Vac 15W. Internal pushbutton, internal cylinder

for PUSHBUTTON LOCKING or HOLD-OPEN function, and external detached cylinder.


Self-locking latchbolt. Detached self-loading spring with adjustable force.


3 KEYS. Adjustable keep with blade. Instructions sheet. Fixing screws.

Backset mm 50	521320505	1	6	6
Backset mm 60	521320605	1	6	6
Backset mm 70	521320705	1	6	6











Key blank 020259 Electric rim lock, painted, RIGHT-HAND. 12Vac 15W.

Internal cylinder and external detached cylinder. Two throws.

Self-locking latchbolt with built-in loading spring with adjustable force.

3 KEYS. Adjustable keep with blade. Instructions sheet. Fixing screws.

Backset mm 50	531010505	1	6	6
Backset mm 60	531010605	1	6	6
Backset mm 70	531010705	1	6	6
Backset mm 80	531010805	1	6	6

Electric rim lock, painted, LEFT-HAND. 12Vac 15W.

Internal cylinder and external detached cylinder. Two throws.

Self-locking latchbolt with built-in loading spring with adjustable force.

 3 KEYS. Adjustable keep with blade. Instructions sheet. Fixing screws.

 Backset mm 50
 531020505
 1
 6
 6

 Backset mm 60
 531020605
 1
 6
 6


 Backset mm 80
 531020805
 1
 6
 6



Min. ord
Multiple
package
Single
package

2001







Electric rim lock, painted, RIGHT-HAND. 12Vac 15W.

Internal pushbutton. Two throws operated by internal cylinder and external detached cylinder.

Self-locking latchbolt with built-in loading spring with adjustable force. ${\bf 3}$ KEYS.

Adjustable keep with blade. Instructions sheet. Fixing screws.

Backset mm 50	531210505	1	6	6
Backset mm 60	531210605	1	6	6
Backset mm 70	531210705	1	6	6
Backset mm 80	531210805	1	6	6

Electric rim lock, painted, LEFT-HAND. 12Vac 15W. Internal pushbutton.


Two throws operated by internal cylinder and external detached cylinder. Self-locking latchbolt

with built-in loading spring with adjustable force. 3 KEYS. Adjustable keep with blade.

Instructions sheet. Fixing screws.

Backset mm 50	531220505	1	6	6
Backset mm 60	531220605	1	6	6
Backset mm 70	531220705	1	6	6
Backset mm 80	531220805	1	6	6

Doors opening direction.

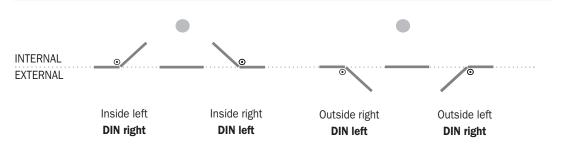




) ode

Min. ord
Multiple
package
Single
package


Elettrica 500













Electric rim lock, painted, LEFT- OR RIGHT-HAND. 12Vac 15W.

Internal pushbutton and external detached cylinder. Self-locking latchbolt with built-in loading spring.

3 KEYS. Adjustable keep. Instructions sheet.


Backset mm 50	511500	1	10 10	
Backset mm 60	511600	1	10 10	
Backset mm 70	511700	1	10 10	
Backset mm 80	511800	1	10 10	



Multiple package Single package

Portoncino







Key blank 020259

Code	S
40*402	80
40*502	100
40*603	120
40*703	140


Rim lock, **RIGHT-HAND**, with internal knob and external detached cylinder, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Screws.

2-throw deadbolt. Backset mm 40	401402	1	10 10	
2-throw deadbolt. Backset mm 50	401502	1	10 10	
3-throw deadbolt. Backset mm 60	401603	1	10 10	
3-throw deadbolt. Backset mm 70	401703	1	10 10	

Rim lock, **LEFT-HAND**, with internal knob and external detached cylinder, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Screws.

2-throw deadbolt. Backset mm 40	402402	1	10 10	
2-throw deadbolt. Backset mm 50	402502	1	10 10	
3-throw deadbolt. Backset mm 60	402603	1	10 10	
3-throw deadbolt. Backset mm 70	402703	1	10 10	









Rim lock, **RIGHT-HAND**, with internal knob and fixed external cylinder \emptyset mm 26x50, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Escutcheon.

2-throw deadbolt. Backset mm 40	411402	2	10 1	0
2-throw deadbolt. Backset mm 50	411502	2	10 1	0
3-throw deadbolt. Backset mm 60	411603	2	10 1	0
3-throw deadbolt. Backset mm 70	411703	2	10 1	0

Rim lock, **LEFT-HAND**, with internal knob and fixed external cylinder Ø mm 26x50, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Escutcheon.

2-throw deadbolt. Backset mm 40	412402	2	10	10
2-throw deadbolt. Backset mm 50	412502	2	10	10
3-throw deadbolt. Backset mm 60	412603	2	10	10
3-throw deadbolt. Backset mm 70	412703	2	10	10




Multiple package Single package

Portoncino









Key blank 020259

Code	S
42*402	80
42*502	100
42*603	120
42*703	140

Rim lock, **RIGHT-HAND**, with internal cylinder and external detached cylinder, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Screws.


2-throw deadbolt. Backset mm 40	421402	1	10 10	
2-throw deadbolt. Backset mm 50	421502	1	10 10	
3-throw deadbolt. Backset mm 60	421603	1	10 10	
3-throw deadbolt. Backset mm 70	421703	1	10 10	


Rim lock, **LEFT-HAND**, with internal cylinder and external detached cylinder, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Screws.

, , , , , , , , , , , , , , , , , , ,			
2-throw deadbolt. Backset mm 40	422402	1	10 10
2-throw deadbolt. Backset mm 50	422502	1	10 10
3-throw deadbolt. Backset mm 60	422603	1	10 10
3-throw deadbolt, Backset mm 70	422703	1	10 10











Key blank 020259

Code	s	
43*402	80	
43*502	100	
43*603	120	
43*703	140	

Rim lock, **RIGHT-HAND**, with internal cylinder and fixed external cylinder \emptyset mm 26x50, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Escutcheon.


2-throw deadbolt. Backset mm 40	431402	2	10	10
2-throw deadbolt. Backset mm 50	431502	2	10	10
3-throw deadbolt. Backset mm 60	431603	2	10	10
3-throw deadbolt. Backset mm 70	431703	2	10	10


Rim lock, **LEFT-HAND**, with internal cylinder and fixed external cylinder \emptyset mm 26x50, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Escutcheon.

2-throw deadbolt. Backset mm 40	432402	2	10 10	
2-throw deadbolt. Backset mm 50	432502	2	10 10	
3-throw deadbolt. Backset mm 60	432603	2	10 10	
3-throw deadbolt. Backset mm 70	432703	2	10 10	











Key blank 020259

Code	S
42*502E	100
42*603E	120
42*703E	140

Rim lock for wooden frames, **RIGHT-HAND**, with internal cylinder and external detached cylinder, separate latchbolt with internal rod and external latchlocking by key. **3 KEYS**. Keep. Screws.

PACKAGING: 30-PIECE BOX.

2-throw deadbolt. Backset mm 50	421502E	2	30	30
3-throw deadbolt. Backset mm 60	421603E	2	30	30
3-throw deadbolt. Backset mm 70	421703E	2	30	30



packag

Min. ord
Multiple
package
Single
package


Portoncino


Rim lock, **LEFT-HAND**, with internal cylinder and externaldetached cylinder, separate latchbolt with internal rod and external latchlocking by key.

3 KEYS. Keep. Screws. PACKAGING: 30-PIECE BOX.

2-throw deadbolt. Backset mm 50	422502E	2	30	30
3-throw deadbolt. Backset mm 60	422603E	2	30	30
3-throw deadbolt. Backset mm 70	422703E	2	30	30









020259

Code	S
43*502E	100
43*603E	120
43*703E	140

Rim lock, **RIGHT-HAND**, with internal cylinder and fixed external cylinder Ø mm 26x50, separate latchbolt with internal rod and external latchbocking by key. **3 KEYS**. Keep. Screw nut.

PACKAGING: 30-PIECE BOX.


2-throw deadbolt. Backset mm 50	431502E	2	30	30
3-throw deadbolt. Backset mm 60	431603E	2	30	30
3-throw deadbolt. Backset mm 70	431703E	2	30	30


Rim lock, **LEFT-HAND**, with internal cylinder and fixed external cylinder Ø mm 26x50, separate latchbolt with internal rod and external latchlocking by key.

3 KEYS. Keep. Escutcheon. PACKAGING: 30-PIECE BOX.

2-throw deadbolt. Backset mm 50	432502E	2	30 30)
3-throw deadbolt. Backset mm 60	432603E	2	30 30)
3-throw deadbolt. Backset mm 70	432703E	2	30 30)









Code	S
43*502	100
43*603	120
43*703	140

 $\label{eq:Right-HAND} \mbox{Rim lock, $\textbf{RIGHT-HAND}$, with internal cylinder}$

and external fixed cylinder Ø mm 26x50. 3 KEYS. Keep. Escutcheon.

2-throw deadbolt. Backset mm 50	437502	2	10 10	
3-throw deadbolt. Backset mm 60	437603	2	10 10	
3-throw deadbolt. Backset mm 70	437703	2	10 10	

 $\mbox{Rim lock, } \mbox{\bf LEFT-HAND}, \mbox{ with internal cylinder and external}$

fixed cylinder Ø mm 26x50. 3 KEYS. Keep. Escutcheon.

2-throw deadbolt. Backset mm 50	438502	2	10 1	0
3-throw deadbolt. Backset mm 60	438603	2	10 1	0
3-throw deadbolt. Backset mm 70	438703	2	10 1	0




Min. ord.
Multiple
package
Single
package

Portoncino



020259



VERTICAL, RIGHT-HAND rim lock. Internal cylinder and external fixed cylinder Ø mm 26x50,


separate latchbolt with internal rod and external latchlocking by key.

2-throw deadbolt. Backset mm 45. **3 KEYS**. Keep. Escutcheon. **425010450** 2 10 10

VERTICAL, **LEFT-HAND** rim lock. Internal cylinder and external fixed cylinder \emptyset mm 26x50, separate latchbolt with internal rod and external latchlocking by key.

2-throw deadbolt. Backset mm 45. **3 KEYS**. Keep. Escutcheon. **425020450** 2 10 10





Key blank 020259

VERTICAL, RIGHT-HAND rim lock. Internal cylinder and external

fixed cylinder Ø mm 26x50, 2-throw deadbolt.


Backset mm 45. **3 KEYS**. Keep. Escutcheon. **435010450** 2 10 10

VERTICAL, LEFT-HAND rim lock. Internal cylinder and external

fixed cylinder Ø mm 26x50, 2-throw deadbolt.

Backset mm 45. **3 KEYS**. Keep. Escutcheon. **435020450** 2 10 10







VERTICAL, RIGHT-HAND rim lock. Internal cylinder and external fixed cylinder Ø mm 26x50. Separate latchbolt, handle follower mm 8. Centre distance cylinder follower mm 70. 2-throw deadbolt. Backset mm 45. **3 KFYS.** Keep. Escutcheon.

3 KEYS. Keep. Escutcheon. **495018450** 2 10 10

VERTICAL, LEFT-HAND rim lock. Internal cylinder and external

fixed cylinder Ø mm 26x50, Separate latchbolt, handle follower mm 8.

Centre distance cylinder follower 70 mm. 2-throw deadbolt.

Backset mm 45. **3 KEYS**. Keep. Escutcheon. **495028450** 2 10 10





Multiple package Single package

Ferroglietto












Rim lock, with internal unlatching knob and EXTERNAL DETACHED CYLINDER,


3 KEYS. 6-THROW DEADBOLT. Keep. Screws.

Backset mm 40	300406	2	10 10	
Backset mm 50	300506	2	10 10	
Backset mm 60	300606	2	10 10	












Rim lock, with internal unlatching knob and **EXTERNAL FIXED CYLINDER** Ø mm 26x50


3 KEYS. 6-THROW DEADBOLT. Keep. Escutcheon.

Backset mm 40	310406	2	10	10
Backset mm 50	310506	2	10	10
Backset mm 60	310606	2	10	10











Key blank 020259 Rim lock, with internal unlatching knob and EXTERNAL DETACHED CYLINDER,

3 KEYS. 5-THROW DEADBOLT + BUILT-IN LATCHBOLT. Keep. Screws.

Backset mm 40	320405	2	10 10	
Backset mm 50	320505	2	10 10	
Backset mm 60	320605	2	10 10	

Rim lock, with internal unlatching knob and EXTERNAL DETACHED CYLINDER,

3 KEYS. 7-THROW DEADBOLT + BUILT-IN LATCHBOLT. Keep. Screws.

O REIO. 1-IIIROW DEADBOEL I BOILI-IN EATONBOEL. Reep. Ociews.				
Backset mm 40	320407	2	10 10	
Backset mm 50	320507	2	10 10	
Backset mm 60	320607	2	10 10	







Min. ord.
Multiple
package
Single
package

Ferroglietto











Rim lock, with internal unlatching knob and **EXTERNAL FIXED CYLINDER** \emptyset mm 26x50

3 KEYS. 5-THROW DEADBOLT+BUILT-IN LATCHBOLT. Keep. Eschutcheon.

Backset mm 40	330405	2	10	10				
Backset mm 50					330505	2	10 10	
Backset mm 60					330605	2	10 10	


Rim lock, with internal unlatching knob and $\textbf{EXTERNAL FIXED CYLINDER} \ \emptyset \ \text{mm} \ 26\text{x}50$


3 KEYS. 7-THROW DEADBOLT+BUILT-IN LATCHBOLT. Keep. Eschutcheon.

Backset mm 40	330407	2	10 10
Backset mm 50	330507	2	10 10
Backset mm 60	330607	2	10 10











Key blank 020259 Rim lock, with internal unlatching knob and EXTERNAL DETACHED CYLINDER,


separate latchbolt with internal rod and external latchlocking by key.


6-THROW DEADBOLT. 3 KEYS. Keep. Screws.

Backset mm 50	340506	2	10	10
Backset mm 60	340606	2	10	10
Backset mm 70	340706	2	10	10









Key blank 020259

Rim lock, with internal unlatching knob and EXTERNAL FIXED CYLINDER

Ø mm 26x50, separate latchbolt with internal rod and external latchlocking by key.

6-THROW DEADBOLT. 3 KEYS. Keep. Screws.

Backset mm 50	350506	2	10	10	
Backset mm 60	350606	2	10	10	
Backset mm 70	350706	2	10	10	




Min. ord.


Multiple
package
Single
package

Verrou














Rim lock, painted, **BOTH RIGHT- AND LEFT HAND.** Internal knob and external cylinder Ø 26.

Two mm 10 throws. Keep, cylinder escutcheon, assembly template,


fixing screws, 3 KEYS.

Cylinder length mm 40	460400	1	10 10	
Cylinder length mm 45	460450	1	10 10	
Cylinder length mm 50	460500	1	10 10	
Cylinder length mm 60	460600	1	10 10	













Rim lock, painted, **BOTH RIGHT- AND LEFT HAND**. Double cylinder \emptyset 26.

Two mm 10 throws. Keep, cylinder escutcheon, assembly template,

fixing screws, 3 KEYS.

nang solews, o Refe.				
Cylinder length mm 40	470400	1	10 1	0
Cylinder length mm 45	470450	1	10 1	0
Cylinder length mm 50	470500	1	10 1	0
Cylinder length mm 60	470600	1	10 1	0




Multiple package Single package

Furniture locks





Key blank 020149



FITTING furniture lock, zinc-plated case, brass cylinder \emptyset mm 22x20.


Escutcheon and striking plate.

0 p			
Backset mm 25. 1 throw	100251	10 - 10	
Backset mm 30. 2 throws	100301	10 - 10	
Backset mm 35. 2 throws	100351	10 - 10	
Backset mm 40. 2 throws	100401	10 - 10	
Backset mm 45. 2 throws	100451	10 - 10	
Backset mm 50. 2 throws	100501	10 - 10	





Key blank 020149




RIM furniture lock, zinc-plated case, brass cylinder \emptyset mm 22x20.

Escutcheon and striking plate.

Backset mm 25. 1 throw	102251	10	- 10	
Backset mm 30. 2 throws	102301	10	- 10	
Backset mm 35. 2 throws	102351	10	- 10	
Backset mm 40. 2 throws	102401	10	- 10	
Backset mm 50. 2 throws	102501	10	- 10	







RIM furniture lock, zinc-plated case, brass cylinder Ø mm 22x20.

Escutcheon and striking plate.

Backset mm 30. 1 throw with built-in latchbolt 103301 10 - 10




Multiple package Single package

Furniture locks



Key blank 020149




Rim lock for **DRAWER AND VERTICAL WING**, zinc-plated case.

Escutcheon. Key removal when locked.

Brass cylinder Ø mm 22x20	106214	10	- 10
Nickel-plated brass cylinder Ø mm 22x20	106219	10	- 10



Key blank 020149




Rim lock for **RIGHT-HAND WING**, zinc-plated case.

Escutcheon. Key removal when locked.

Brass cylinder Ø mm 22x20	107214	10	- 10
Nickel-plated brass cylinder Ø mm 22x20	107219	10	- 10



Key blank 020149



Rim lock for **LEFT-HAND WING**, zinc-plated case.

Escutcheon. Key removal when locked.

Brass cylinder Ø mm 22x20	108214	10	- 10
Nickel-plated brass cylinder Ø mm 22x20	108219	10	- 10



Accessories



Pair of standard coils 12Vac 15W. For rim lock series 500-505-510. 050020 10 - 10




Pair of standard coils **12Vac 15W.** For rim locks series 52**-53**.

050035

- 10

10




Pair of pressure electrical contacts FOR 12V ELECTRIC LOCKS. Six spacers mm 2x22.

Four spacers mm 2x16. One spacer mm 5. Instructions.

050060


- 10

10



Flat striking plate, square edge, with blade, for locks for wooden frames series 200N-221-221N.

BRASS-PLATED STEEL mm 204x22x1,5	032011	10	- 10	
GOLD PAINTED STEEL mm 204x22x1,5	032016	10	- 10	
BRASS mm 204x22x1,5	032017	10	- 10	
CHROME-PLATED STEEL mm 204x22x1,5	032013	10	- 10	
STAINLESS STEEL mm 204x22x1,5	032010	10	- 10	




Angle striking plate for locks for wooden frames series 200N-221N.

BRASS-PLATED STEEL mm 204x25x8x1,5

032021

- 10

10





Flat striking plate, round edge, with blade, for locks for wooden frames series 210N.

BRASS-PLATED STEEL mm 204x22x1,5	032031	10	- 10
GOLD PAINTED STEEL mm 204x22x1,5	032036	10	- 10




032111

10 - 10


Min. ord.
Multiple
package
Single
package

Accessories



Flat, heavy striking plate, round edge, for locks for wooden frames series 210N.


BRASS-PLATED STEEL mm 240x22x3	032051	10	- 10
CHROME-PLATED STEEL mm 240x22x3	032053	10	- 10



Flat striking plate, square edge, with double blade for roller locks for wooden frames series 280N.

frames series 280N.

BRASS-PLATED STEEL mm 204x22x1,5



Flat striking, square edge, for locks for wooden frames with deadbolt only series 201.


BRASS-PLATED mm 126x22x1,5 **032071** 10 - 10



.

Multiple package Single package

Accessories




PAINTED STEEL keep. Standard version for series 300-310-320-330.

035015

_ 1


10



Keep with blade for electric locks series 5310-5312-5314.

PAINTED STEEL. STAINLESS STEEL sliding plate.


left-hand **050123** 5 - 5



Reduction for handle follower from mm 8 to mm 6.040860100- 100Reduction for handle follower from mm 8 to mm 7.040870100- 100









CHIAVE	L	CHIAVE	L
Total Control of the	0 ÷ 12.5	TERES O	7 : 12 5
	0 : 125		2 ÷ 12 5

Escutcheon for European profile cylinder, inside fixing. IN CARBONITRIDED STEEL,

BRASS-PLATED and TRANSPARENT PAINT. External protection plate.

External escutcheon. ANTI-DRILL DISK.

Disk spacer. Spacing ring. Internal plate.

Internal escutcheon. Gasket. Fixing screws.

043030

1 - 1




Min. ord
Multiple
package
Single
package

Mortice locks



CODICE	E	L
1301.00.40	40	92
1301.00.50	50	100
1301.00.60	60	108
1301.00.70	70	118



CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 1 cross-key KA cod. 91.01.75

Backset mm 40	1301.10.40	1	-	1
Backset mm 50	1301.10.50	1	-	1
Backset mm 60	1301.10.60	1	-	1
Backset mm 70	1301.10.70	1	-	1


CLOSED-CASE mortice lock with DEADBOLT only.


FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 cross-keys cod. 91.01.75

Backset mm 40	1301.00.40	1	- 1	
Backset mm 50	1301.00.50	1	- 1	
Backset mm 60	1301.00.60	1	- 1	
Backset mm 70	1301.00.70	1	- 1	







CLOSED-CASE mortice lock with LATCHBOLT AND DEADBOLT.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws and latch. 1 cross-key KA cod. 91.01.75

Backset mm 50	1321.10.50	1	-	1
Backset mm 60	1321.10.60	1	-	1
Backset mm 70	1321.10.70	1	-	1

CLOSED-CASE mortice lock with LATCHBOLT AND DEADBOLT.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws and latch. 3 cross-keys cod. 91.01.75

,				
Backset mm 50	1321.00.50	1	-	1
Backset mm 60	1321.00.60	1	-	1
Backset mm 70	1321.00.70	1	-	1




Min. ord
Multiple
package
Single
package

Mortice locks



Cylinder to be ordered separately

Е	CODICE
50	1320.04.50
60	1321.04.60
70	1321.04.70



CLOSED-CASE mortice lock with LATCHBOLT AND DEADBOLT, operating with European profile cylinder.


FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws and latch.

Backset mm 50	1320.04.50	1	- 1	
Backset mm 60	1320.04.60	1	- 1	
Backset mm 70	1320.04.70	1	- 1	-



Ε	L	
40	93	
50	113	
60	123	
70	133	



CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 double bitted keys cod. 31.00.65. Coupled locks.

Backset mm 40	3131.01.40	1	- 1	
Backset mm 50	3131.01.50	1	- 1	
Backset mm 60	3131.01.60	1	- 1	
Backset mm 70	3131.01.70	1	- 1	

CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 1 double bitted key KA. cod. 31.00.65.

Backset mm 40	3131.10.40	1	- 1	
Backset mm 50	3131.10.50	1	- 1	
Backset mm 60	3131.10.60	1	- 1	
Backset mm 70	3131.10.70	1	- 1	

CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 double bitted keys cod. 31.00.65.

Tour time to deduce stated help country.				
Backset mm 40	3131.00.40	1	- 1	
Backset mm 50	3131.00.50	1	- 1	
Backset mm 60	3131.00.60	1	- 1	
Backset mm 70	3131.00.70	1	- 1	




Multiple package Single package

Mortice locks



Ε	L
50	113
60	123
70	133



CLOSED-CASE mortice lock with DEADBOLT only. FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 double bitted keys cod. 40.00.75. Coupled locks.

Backset mm 50	3132.01.50	1	- 1	
Backset mm 60	3132.01.60	1	- 1	
Backset mm 70	3132.01.70	1	- 1	

CLOSED-CASE mortice lock with DEADBOLT only. FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 1 double bitted key KA. cod. 40.00.75.

Backset mm 50	3132.10.50	1	-	1
Backset mm 60	3132.10.60	1	-	1
Backset mm 70	3132.10.70	1	-	1


 ${\tt CLOSED\text{-}CASE}\ mortice\ lock\ with\ DEADBOLT\ only.}\ \textbf{FOREND\ AND\ STRIKING\text{-}PLATE\ IN\ SATINATED\ BRASS,\ VARNISHED.}$

Four throws. 3 double bitted keys cod. 40.00.75.

Backset mm 50	3132.00.50	1	-	1
Backset mm 60	3132.00.60	1	-	1
Backsetmm 70	3132.00.70	1	-	1



CODICE	Е	L	
3133.00.60	60	122	
3133 00 70	70	132	



CLOSED-CASE mortice lock with DEADBOLT only. FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 double bitted keys cod. 40.00.75. Coupled locks.

Backset mm 60	3133.01.60	1	- 1
Backset mm 70	3133.01.70	1	- 1

CLOSED-CASE mortice lock with DEADBOLT only. FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 1 double bitted key KA. cod. 40.00.75.

Backset mm 60	3133.10.60	1	-	1
Backset mm 70	3133.10.70	1	-	1

CLOSED-CASE mortice lock with DEADBOLT only. FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. 3 double bitted keys cod. 40.00.75.


Backset mm 60	3133.00.60	1	- 1
Backset mm 70	3133.00.70	1	- 1



Min. ord
Multiple
package
Single
package

Mortice locks





CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. Three locking points. 1 double bitted key KA. cod. 40.00.75.

Backset mm 60	3134.10.60	1	- 1	
Backset mm 70	3134.10.70	1	- 1	

CLOSED-CASE mortice lock with DEADBOLT only.


FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Four throws. Three locking points. 3 double bitted keys cod. 40.00.75.

Backset mm 60	3134.00.60	1	- 1	
Backset mm 70	3134.00.70	1	- 1	



L 113 123 133



CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Coupled locks. Four throws. Four locking points.

Double bitted keys n.3. Cod. 40.00.95.

Backset mm 60	3135.01.60	1	- 1	
Backset mm 70	3135.01.70	1	- 1	

CLOSED-CASE mortice lock with DEADBOLT only.

FOREND AND STRIKING-PLATE IN SATINATED BRASS, VARNISHED.

Coupled locks. Four throws. Four locking points.

Double bitted keys n.3. Cod. 40.00.75.


Backset mm 60	3135.00.60	1	- 1
Backset mm 70	3135.00.70	1	- 1



Multiple package Single package

Mortice locks with cylinder





Mortice locks operating with European-profile cylinder.


Three throws and latch, forend in chrome-plated steel, three locking points, zinc-plated.

Backset 60

463.04.60

10 10





 $\label{prop:continuous} \mbox{Mortice locks with cylinde, operating with European-profile cylinder.}$


Three throws and latch, forend in chrome-plated steel, three locking points, zinc-plated.

Backset 60

3164.04.60

10 10





Mortice locks with cylinde, operating with European-profile cylinder.

Coupled locks, three throws, four locking points, forends

in chrome-plated steel, zinc-plated.

Backset 60

3165.01.60


10 10

1



Min. ord.
Multiple
package
Single
package

Accessories



Adjustable rod, anti-saw tips.

For item 3134.


9999.00.16 1 10 10



Adjustable rod, anti-saw tips.

For item 3134 AB.


9999.00.14 1 10 10



Set of escutcheons, in polished brass.

For item 3131/3132/3133/3134/3134 AB.

right-hand **98.02.0121** 1 10 10



Floor socket, in polished brass

For locks with rods

 Ø 14 mm
 192.00.0000.4027
 1
 10
 10


 Ø 18 mm
 192.00.0000.4029
 1
 10
 10



Min. ord Multiple package Single package

Accessories






ONE. Escutcheon

In tempered steel

Included fixing screws M6.


BLACK VARNISHED	98.01.4624	1	10 10
POLISHED BRASS VARNISHED	98.02.4624	1	10 10
SATIN CHROME	98.03.4624	1	10 10
POLISHED CHROME	98.04.4624	1	10 10





Set of escutcheons

POLISHED BRASS VARNISHED	98.0B.3120	1 10 10



Set of escutcheons

for item 1300 K/1320 K - BRASS PLATED	98.01.1301	1	10	10
for item 1200 K/1203 K/1400 K/1500 K - NICKEL-PLATED	98.01.1201	1	10	10



)ode

Min. ord.
Multiple
package
Single
package

Sbarra



Reversible security bar operating with European profile cylinder. Horizontal fixing. Chrome-plated steel base and aluminium case. Single throw with deadbolts travel distance mm 80 **ON THE RIGHT AND ON THE LEFT**. Pair of narrow-base rim strikers.

One mortice striker. Internal black nylon cylinder escutcheon.

Assembly template. Fixing screws. Instructions sheet.

Cylinder to be order separately.

Bar mm 700 (S)			
BRONZE PAINTED	904702	1	- 1
WHITE PAINTED	904704	1	- 1
Bar mm 800 (S)			
GOLD PAINTED	904801	1	- 1
BRONZE PAINTED	904802	1	- 1
WHITE PAINTED	904804	1	- 1
3ar mm 850 (S)			
GOLD PAINTED	904851	1	- 1
Bronze Painted	904852	1	- 1
NHITE PAINTED	904854	1	- 1
3ar mm 900 (S)			
GOLD PAINTED	904901	1	- 1
BRONZE PAINTED	904902	1	- 1
NHITE PAINTED	904904	1	- 1
Bar mm 970 (S)			
GOLD PAINTED	904971	1	- 1
BRONZE PAINTED	904972	1	- 1
WHITE PAINTED	904974	1	- 1

TO BE USED WITH CYLINDER WITH PROJECTING DIN CAM

Door thickness mm	Door length mm	0 0 0 0 0 0 0 0 0 0	Cylinde	er code	e	
40	85	8**9	30	55	*	
45	90	8**9	30	60	*	
55	100	8**9	30	70	*	-6
65	110	8**9	30	80	*	C D



Multiple package Single package

Accessories



External plate with hole for European profile cylinder for bar series 904*.

In zamak. Inside fixing with screws.

CHROME PLATED

BRONZE PAINTED

9909012

1 - 1

WHITE PAINTED

9909014

1 - 1



External plate for bar series 904*, with anti-drill disk in steel. Anti-drill balls for screws. Gasket. Adjustable escutcheon. Inside fixing by screws.

BRONZE PAINTED	990982	1	-	1
WHITE PAINTED	990984	1	-	1



Narrow-base striker with built-in slide guard for bars series 904*. Three spacers mm 2. Three spacers mm 5. One nylon fork with one spacer. Screws.


BRONZE PAINTED case	990972	1	-	1
WHITE PAINTED case	990974	1	-	1



ode

Min. ord.
Multiple
package
Single
package


Accessories





Spacer for narrow-base striker for bar series 904*. CHROME-PLATED ABS mm 2

990904

10 - 10







Pair of spacers for narrow-base striker for bar series 904*.

One in CHROME-PLATED steel mm 1,3. One in CHROME-PLATED zamak mm 15

990929


10 - 10



Min. ord.
Multiple
package
Single
package

Perfecta








PERFECTA security rim lock. BRONZE painted. LATERAL LOCKING with


5 loading springs Ø mm 18. Four mm 10 throws. INTERNAL KEY-GUIDE.

3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.

Nickel plated brass escutcheon \emptyset mm 33. Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	911005/D	1	-	1
RIGHT-HAND. External pump cylinder mm 60	911005/D.60	1	-	1
LEFT-HAND. External pump cylinder mm 50	911005/S	1	-	1
LEFT-HAND, External pump cylinder mm 60	911005/S.60	1	-	1







PERFECTA security rim lock. BRONZE painted. LATERAL LOCKING with


4 loading springs \emptyset mm 18. Four mm 10 throws. INTERNAL KNOB.

3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.

Nickel plated brass escutcheon Ø mm 33. Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	911015/D	1	- 1	
RIGHT-HAND. External pump cylinder mm 60	911015/D.60	1	- 1	
LEFT-HAND. External pump cylinder mm 50	911015/\$	1	- 1	
LEFT-HAND. External pump cylinder mm 60	911015/S.60	1	- 1	







PERFECTA security rim lock. BRONZE painted. LATERAL LOCKING with

4 loading springs Ø mm 18 and latchbolt. Four mm 10 throws. **INTERNAL KEY-GUIDE**.

LATCHLOCKING BY KNOB INSIDE AND BY KEY OUTSIDE.

3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.


·	_			
RIGHT-HAND. External pump cylinder mm 50	911105/D	1	- 1	
RIGHT-HAND. External pump cylinder mm 60	911105/D.60	1	- 1	
LEFT-HAND. External pump cylinder mm 50	911105/S	1	- 1	
LEFT-HAND. External pump cylinder mm 60	911105/S.60	1	- 1	




Ode

Min. ord
Multiple
package
Single
package

Perfecta







PERFECTA security rim lock. BRONZE painted. LATERAL LOCKING with

4 loading springs \emptyset mm 18 and latchbolt. Four mm 10 throws. INTERNAL KNOB. LATCHLOCKING


BY KNOB INSIDE AND BY KEY OUTSIDE. 3 PUMP KEYS. One ABS keyhead.

Painted anti-break tube for external cylinder \emptyset mm 33. Brass painted escutcheon \emptyset mm 33.

Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	911115/D	1	-	1
RIGHT-HAND. External pump cylinder mm 60	911115/D.60	1	-	1
LEFT-HAND. External pump cylinder mm 50	911115/S	1	-	1
LEFT-HAND. External pump cylinder mm 60	911115/S.60	1	-	1



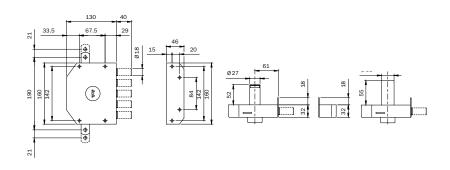

PERFECTA security rim lock. BRONZE painted. $\ensuremath{\mathbf{3\text{-}POINT\ LOCKING}}$.

Lateral locking with 5 loading springs \emptyset mm 18. Four mm 10 throws. Top/bottom vertical locking

with hole for rods connection, travel range mm 21. INTERNAL KEY-GUIDE.

Two rod-guides. Projecting part mm 35 for rods. Upper striker. Floor socket.

3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.

RIGHT-HAND. External pump cylinder mm 50	913005/D	1	-	1
RIGHT-HAND. External pump cylinder mm 60	913005/D.60	1	-	1
LEFT-HAND. External pump cylinder mm 50	913005/S	1	-	1
LEFT-HAND. External pump cylinder mm 60	913005/S.60	1	-	1




ode

Min. ord.
Multiple
package
Single
package

Perfecta



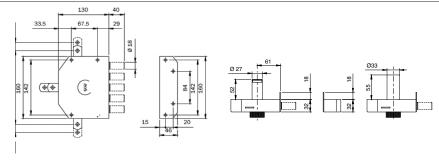

PERFECTA security rim lock. BRONZE painted. **3-POINT LOCKING**.

Lateral locking with 5 loading springs Ø mm 18. Four mm 10 throws. Top/bottom vertical locking

with hole for rods connection, travel range mm 21. INTERNAL KNOB. Two rod guides.


Projecting part mm 35 for rods. Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for external cylinder \emptyset mm 33.

Nickel plated brass escutcheon Ø mm 33. Striker with blade. Fixing screws

RIGHT-HAND. External pump cylinder mm 50	913015/D	1	-	1	
RIGHT-HAND. External pump cylinder mm 60	913015/D.60	1	-	1	
LEFT-HAND. External pump cylinder mm 50	913015/S	1	-	1	
LEFT-HAND. External pump cylinder mm 60	913015/S.60	1	-	1	



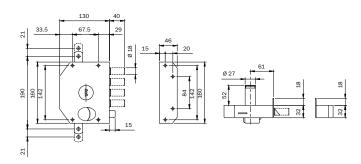

PERFECTA security rim lock. BRONZE painted. 3-POINT LOCKING.

Lateral locking with 4 loading springs Ø mm 18. Four mm 10 throws. Top/bottom vertical locking with hole for rods connection, travel range mm 21. **INTERNAL KEY-GUIDE**.

LATCHLOCKING BY KNOB INSIDE AND BY KEY OUTSIDE. Two rod-guides. Projecting part mm 35 for rods.

Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.


RIGHT-HAND. External pump cylinder mm 50	913105/D	1	- 1	
RIGHT-HAND. External pump cylinder mm 60	913105/D.60	1	- 1	
LEFT-HAND. External pump cylinder mm 50	913105/S	1	- 1	
LEFT-HAND. External pump cylinder mm 60	913105/S.60	1	- 1	



Min. ord.
Multiple
package
Single
package

Perfecta



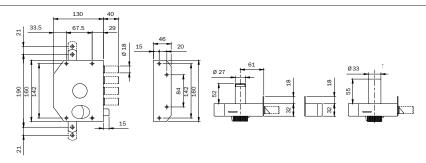

PERFECTA security rim lock. BRONZE painted. 3-POINT LOCKING.

Lateral locking with 4 loading springs Ø mm 18 and latchbolt. Four mm 10 throws. Top/bottom vertical locking with hole for rods connection, travel range mm 21. **INTERNAL KNOB. LATCHLOCKING BY**


KNOB FROM INSIDE AND BY KEY FROM OUTSIDE. Two rod-guides. Projecting part mm 35 for rods.

Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for external cylinder \emptyset mm 33.

Brass painted escutcheon Ø mm 33. Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	913115/D	1	-	1	
RIGHT-HAND. External pump cylinder mm 60	913115/D.60	1	-	1	
LEFT-HAND. External pump cylinder mm 50	913115/S	1	-	1	
LEFT-HAND. External pump cylinder mm 60	913115/S.60	1	-	1	

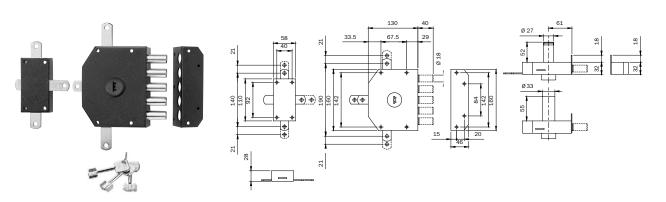

PERFECTA security rim lock. BRONZE painted. 5-POINT LOCKING.

Lateral locking with 5 loading springs \emptyset mm 18. Four mm 10 throws. Vertical locking with

back deviator and top/botttom with hole for rods connection, travel range mm 21.

INTERNAL KEY-GUIDE. Four rod-guides. Projecting part mm 35 for rods.

Upper striker. Two floor sockets. 3 PUMP KEYS.


One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.

RIGHT-HAND. External pump cylinder mm 50	915005/D	1	-	1
LEFT-HAND. External pump cylinder mm 50	915005/S	1	-	1



Min. ord.
Multiple
package
Single
package

Perfecta

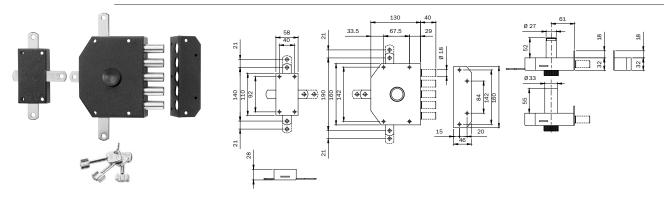

PERFECTA security rim lock. BRONZE painted. 5-POINT LOCKING.

Lateral locking with 5 loading springs Ø mm 18. Four mm 10 throws. Vertical locking with

back deviator and top/bottom with hole for rods connection, travel range mm 21. INTERNAL KNOB.


Four rod-guides. Projecting part mm 35 for rods.

Two upper strikers. Two floor sockets. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.

Nickel plated brass escutcheon \emptyset mm 33. Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	915015/D	1	-	1
LEFT-HAND. External pump cylinder mm 50	915015/S	1	-	1

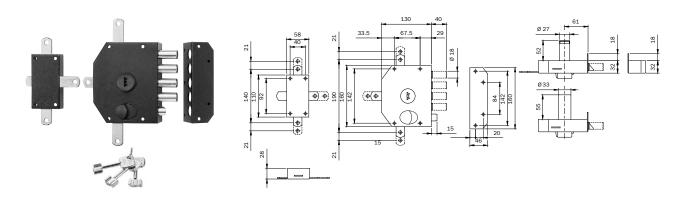

PERFECTA security rim lock. BRONZE painted. 5-POINT LOCKING.

Lateral locking with 4 loading springs \emptyset mm 18 and latchbolt. Four mm 10 throws. Vertical locking with back deviator and top/bottom with hole for rods connection, travel range mm 21.

INTERNAL KEY-GUIDE. LATCHLOCKING BY KNOB FROM INSIDE AND BY KEY FROM OUTSIDE.

Four rod-guides. Projecting part mm 35 for rods. Two upper strikers.

Two floor sockets. 3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.


RIGHT-HAND. External pump cylinder mm 50	915105/D	1	-	1
LEFT-HAND. External pump cylinder mm 50	915105/S	1	-	1



Min. ord.
Multiple
package
Single
package

Perfecta



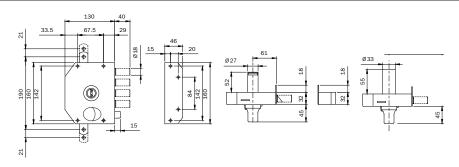

PERFECTA security rim lock. BRONZE painted. 3-POINT LOCKING.

Lateral locking with 4 loading springs Ø mm 18 and latchbolt. Four mm 10 throws. Top/bottom vertical locking with hole for rods connection, travel range mm 21. Nickel-plated internal pump cylinder.


LATCHLOCKING BY KNOB FROM INSIDE AND BY KEY FROM OUTSIDE. Two rod-guides. Projecting part mm 35 for rods.

Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.

Nickel plated brass escutcheon Ø mm 33. Striker with blade. Fixing screws.

RIGHT-HAND. External pump cylinder mm 50	913125/D	1	-	1
RIGHT-HAND. External pump cylinder mm 60	913125/D.60	1	-	1
LEFT-HAND. External pump cylinder mm 50	913125/S	1	-	1
LEFT-HAND. External pump cylinder mm 60	913125/S.60	1	-	1

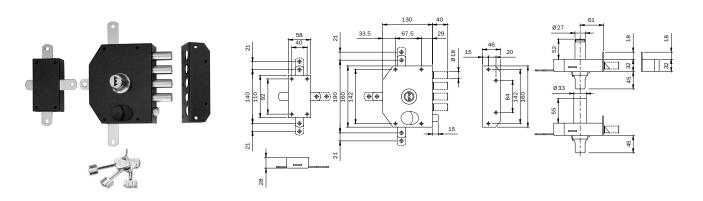

PERFECTA security rim lock. BRONZE painted. 5-POINT LOCKING.

Lateral locking with 4 loading springs \emptyset mm 18 and latchbolt. Four mm 10 throws. Vertical locking with back deviator and top/bottom with hole for rods connection, travel range mm 21.

NICKEL-PLATED INTERNAL PUMP CYLINDER. LATCHLOCKING BY KNOB FROM INSIDE AND BY KEY FROM OUTSIDE.

Four rod-guides. Projecting part mm 35 for rods. Two upper strikers.

Two floor sockets. 3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.

RIGHT-HAND. External pump cylinder mm 50	915125/D	1	- :	1
LEFT-HAND. External pump cylinder mm 50	915125/S	1	- :	1




) ode

Min. ord.
Multiple
package
Single
package

Vis







VIS reversible security rim lock. **LATERAL LOCKING** with 2 loading springs Ø mm 16.


One mm 27 throw. INTERNAL KEY-GUIDE. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.

Brass painted escutcheon \emptyset mm 33. Striker without blade. Fixing screws.

BRONZE PAINTED. External pump cylinder mm 50 910215 1 - 1
BRONZE PAINTED. External pump cylinder mm 60 910215...60 1 - 1







VIS reversible security rim lock. **LATERAL LOCKING** with 2 loading springs Ø mm 16.

One mm 27 throw. INTERNAL KNOB. 3 PUMP KEYS. One ABS keyhead.

Painted anti-break tube for cylinder Ø mm 33. Nickel plated brass escutcheon Ø mm 33.

Striker without blade. Fixing screws.

BRONZE PAINTED. External pump cylinder mm 50 910315 1 - 1
BRONZE PAINTED. External pump cylinder mm 60 910315...60 1 - 1




Ode

Min. ord.
Multiple
package
Single
package

Vis





VIS reversible security rim lock. BRONZE painted. LATERAL LOCKING with 2 loading springs Ø mm 16. One mm 27 throw. INTERNAL KNOB. WITHOUT EXTERNAL


CYLINDER, WITHOUT KEYS.

Striker without blade. Fixing screws.

9103150

1 - 1





VIS reversible security rim lock. LATERAL LOCKING with 2 loading springs \emptyset mm 16.

One mm 27 throw. NICKEL-PLATED INTERNAL PUMP CYLINDER. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.


BRONZE PAINTED. External pump cylinder mm 50	910415	1	-	1	
BRONZE PAINTED. External pump cylinder mm 60	91041560	1	-	1	



Viultipie packagi Single packag

Vis



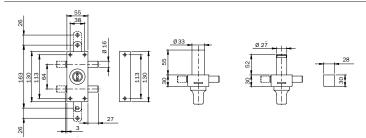

VIS reversible security rim lock. 3-POINT LOCKING. Lateral locking with 2 loading springs Ø mm 16.

One mm 27 throw. Top/bottom vertical locking with hole for rods connection,

travel range mm 26. NICKEL-PLATED INTERNAL PUMP CYLINDER. Two rod-guides. Projecting part mm 35 for rods.


Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.

Nickel plated brass escutcheon \emptyset mm 33. Striker without blade. Fixing screws.

BRONZE PAINTED. External pump cylinder mm 50	910435	1	-	1
BRONZE PAINTED. External pump cylinder mm 60	91043560	1	-	1



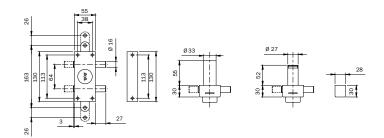

VIS reversible security rim lock. **3-POINT LOCKING**. Lateral locking with 2 loading springs \emptyset mm 16.

One mm 27 throw. Top/bottom vertical locking with hole for rods connection,

travel range mm 26. INTERNAL KEY-GUIDE. Two rod-guides. Projecting part mm 35 for rods.

Upper striker. Floor socket. 3 PUMP KEYS.

One ABS keyhead. Painted anti-break tube for cylinder Ø mm 33.


BRONZE PAINTED. External pump cylinder mm 50	910235	1	- 1	
BRONZE PAINTED. External pump cylinder mm 60	91023560	1	- 1	
BLACK PAINTED. External pump cylinder mm 50	910235N	1	- 1	
BLACK PAINTED. External pump cylinder mm 60	910235N60	1	- 1	



Min. ord.
Multiple
package
Single
package

Vis



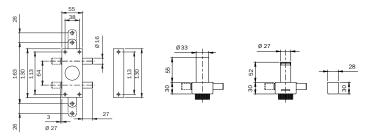

VIS reversible security rim lock. **3-POINT LOCKING**. Lateral locking with 2 loading springs Ø mm 16.

One mm 27 throw. Top/bottom vertical locking with hole for rods connection, travel range mm 26.


INTERNAL KNOB. Projecting part mm 35 for rods. Upper striker. Floor socket.

3 PUMP KEYS. One ABS keyhead. Painted anti-break tube for cylinder \emptyset mm 33.

Nickel plated brass escutcheon Ø mm 33. Striker without blade. Fixing screws.

BRONZE PAINTED. External pump cylinder mm 50	910335	1	-	1
BRONZE PAINTED. External pump cylinder mm 60	91033560	1	-	1
BLACK PAINTED. External pump cylinder mm 50	910335N	1	-	1
BLACK PAINTED. External pump cylinder mm 60	910335N60	1	-	1





VIS reversible security rim lock. BRONZE painted. **3-POINT LOCKING**. Lateral locking with 2 loading springs \emptyset mm 16.


One mm 27 throw. Top/bottom vertical locking with hole for rods connection, travel range mm 26.

INTERNAL KNOB. WITHOUT EXTERNAL CYLINDER, WITHOUT KEYS. TWO ROD GUIDES.

Projecting part mm 35 for rods. Upper striker. Floor socket. Striker without blade.

Fixing screws **9103350** 1 - 1





Security rim lock. 2-POINT LOCKING. Top/bottom vertical locking with hole for rods connection,

travel range mm 26. INTERNAL KEY-GUIDE. Two rod-guides. Projecting part mm 35 for rods.

Upper striker. Floor socket. 3 PUMP KEYS. One ABS keyhead.

Painted anti-break tube for cylinder Ø mm 33.

Nickel plated brass escutcheon \emptyset mm 33. Fixing screws.


BRONZE PAINTED. External pump cylinder mm 50 910205	1	-	1
BRONZE PAINTED. External pump cylinder mm 60 91020560	1	-	1
BLACK PAINTED. External pump cylinder mm 50 910205N	1	-	1
BLACK PAINTED. External pump cylinder mm 60 910205N60	1	-	1



Min. ord.
Multiple
package
Single
package

Vis





Security rim lock. 2-POINT VERTICAL LOCKING. BRONZE painted.

INTERNAL KEY-GUIDE. WITHOUT EXTERNAL CYLINDER, WITHOUT KEYS. Top/bottom locking with hole

for rods connection, travel range mm 26. Two rod guides.


Projecting part mm 35 for rods.

Upper striker. Floor socket. Fixing screws.

9102050

1 - 1





Security rim lock. 2-POINT VERTICAL LOCKING. INTERNAL KNOB. Top/bottom locking with hole

for rods connection, travel range mm 26. Two rod guides. Projecting part mm 35 for rods.


Upper striker. Floor socket. 3 PUMP KEYS. One ABS keyhead.

Painted anti-break tube for cylinder Ø mm 33.

Nickel plated brass escutcheon \emptyset mm 33. Fixing screws.

BRONZE PAINTED. External pump cylinder mm 50	910305	1	-	1
BRONZE PAINTED. External pump cylinder mm 60	91030560	1	-	1
BLACK PAINTED. External pump cylinder mm 50	910305N	1	-	1
BLACK PAINTED. External pump cylinder mm 60	910305N60	1	-	1





Security rim lock. **2-POINT VERTICAL LOCKING**. BRONZE painted.

INTERNAL KNOB. WITHOUT EXTERNAL CYLINDER, WITHOUT KEYS. Top/bottom locking with hole

for rods connection, travel range mm 26. Two rod guides.

Projecting part mm 35 for rods. Upper striker.

Floor socket. Fixing screws 9103050 1 - 1




)ode

Min. ord.
Multiple
package
Single
package







Deviator for second leaf. 2-POINT VERTICAL LOCKING. PREARRANGED FOR INTERNAL SELF-LOCKING KNOB.

WITHOUT EXTERNAL CYLINDER, WITHOUT KEYS. Top/bottom locking with hole for rods connection,

travel range mm 21. Two rod guides. Projecting part mm 35 for rods. Upper striker.


Floor socket. Fixing screws.

BRONZE PAINTED

9103250

1 - 1





Security rim lock. 2-POINT VERTICAL LOCKING. INTERNAL SELF-LOCKING KNOB.

WITHOUT EXTERNAL CYLINDER, WITHOUT KEYS. Top/bottom locking with hole for rods connection,

travel range mm 21. Two rod guides. Projecting part mm 35 for rods. Upper striker.


Floor socket. Fixing screws.

BRONZE PAINTED	910105	1	-	1
BLACK PAINTED	910105N	1	-	1



Multiple package Single package


Accessories



Pair of telescopic rods for 3-point security locks PERFECTA series 910-913. Tip \emptyset 18.

Rings with screw supplied.


BRONZE PAINTED	990063	1	-	1	
BLACK PAINTED	990063N	1	-	1	



Pair of telescopic rods for 3-point security locks PERFECTA series 910-913. Tip \emptyset 9.

Rings with screw supplied. Two anti-dust sockets.


BRONZE PAINTED	990063.RB	1	-	1
BLACK PAINTED	990063.RBN	1	-	1



Pair of telescopic rods for 5-point security locks PERFECTA series 915.

Tip Ø mm 18. BRONZE painted. Ring with screw supplied.





Internal extension \emptyset mm 15x1200 for rods series 990063-990067 for doors max height mm 3200. BRONZE PAINTED.

990122 1 - 1



Mult pack Sing pack

Accessories







Brass locking ring for telescopic rods series 990063-990067. Fixing screw.

990123

10 - 10






Projecting part mm 62, holes center distance mm 35 for rods, for PERFECTA security locks series 910-911-913-915. BRONZE painted. Screw and screw nut.

990049


10 - 10




Projecting part mm 127, holes center distance up to mm 100 for rods, for PERFECTA security locks series 910-911-913-915. BRONZE painted. Screw and screw nut.

990053

10 - 10





Rod guide Ø mm 18 series 990063-990067. BRONZE PAINTED.

990099

10 - 10





Standard upper U-striker for rods Ø mm 18 series 990063-990067. Pin with adjustable rod guide. BRONZE PAINTED.

990103


5 -




Jode

Min. ord.
Multiple
package
Single
package

Accessories






Angle upper U-striker with blades for rods Ø mm 18 series 990063-990067.

Pin with adjustable rod guide. BRONZE PAINTED.

990108

5 - 5



Heavy flat striker, with slots D25 for deadbolts, for VIS locks series 910.

In steel mm 132x24x3.

BRONZE PAINTED

032085

10 - 10






Brass floor socket for rods. Inside hole \emptyset mm 22,5.


For rods Ø mm 18 series 990063-990067.

990094

10 - 10



Brass flat escutcheon for pump cylinder, cylinder hole Ø mm 27.	990084	10	- 10	
Brass flat escutcheon for pump cylinder, anti-break tube hole Ø mm 33.	990086	10	- 10	
Nickel-plated brass flat escutcheon for nump cylinder, anti-break tube hole Ø mm 33	990083	10	- 10	




Concave br	ass esci	utcheon fo	r pump cylinder,	cylinder hole Ø mm	27.	990090	10	_	10
Convex bra	ss escut	cheon for	pump cylinder, c	vlinder hole Ø mm 2	27. 9	90090/C	10	-	10



Multiple packag Single packag


Accessories



Deviator for rods for PERFECTA 5-point security lock series 915. BRONZE PAINTED.

990075


1 - 1



Nylon keyhead for double-bit and pump keys series 990***.

990000


10 - 10



Standard striker with blade for PERFECTA security locks series 911-913-915. BRONZE PAINTED.

990033

1 - 1



Raised striker with blade for PERFECTA security locks series 911-913-915. BRONZE PAINTED.

990037


L - 1



Multiple package Single package

Accessories






Striker reduced to mm 28x156, raised with blade, for PERFECTA security locks series 911-913-915. BRONZE PAINTED.

990038


1 - 1



Striker with extended blade for PERFECTA security locks series 911-913-915. BRONZE PAINTED.

990254

1 - 1




Standard striker without blade for VIS security locks series 910.

BRONZE PAINTED.

990275

1 - 1



Striker with extended blade mm 30 for VIS security locks series 910. BRONZE PAINTED.


990295

1 - 1



Min. ord.
Multiple
package
Single
package

Accessories





Knob for latchbolt, for PERFECTA security rim locks. BLACK.

990130

1 - 1







Knob for bolt-throw, for VIS security rim locks. BLACK.


990131

1 - 1

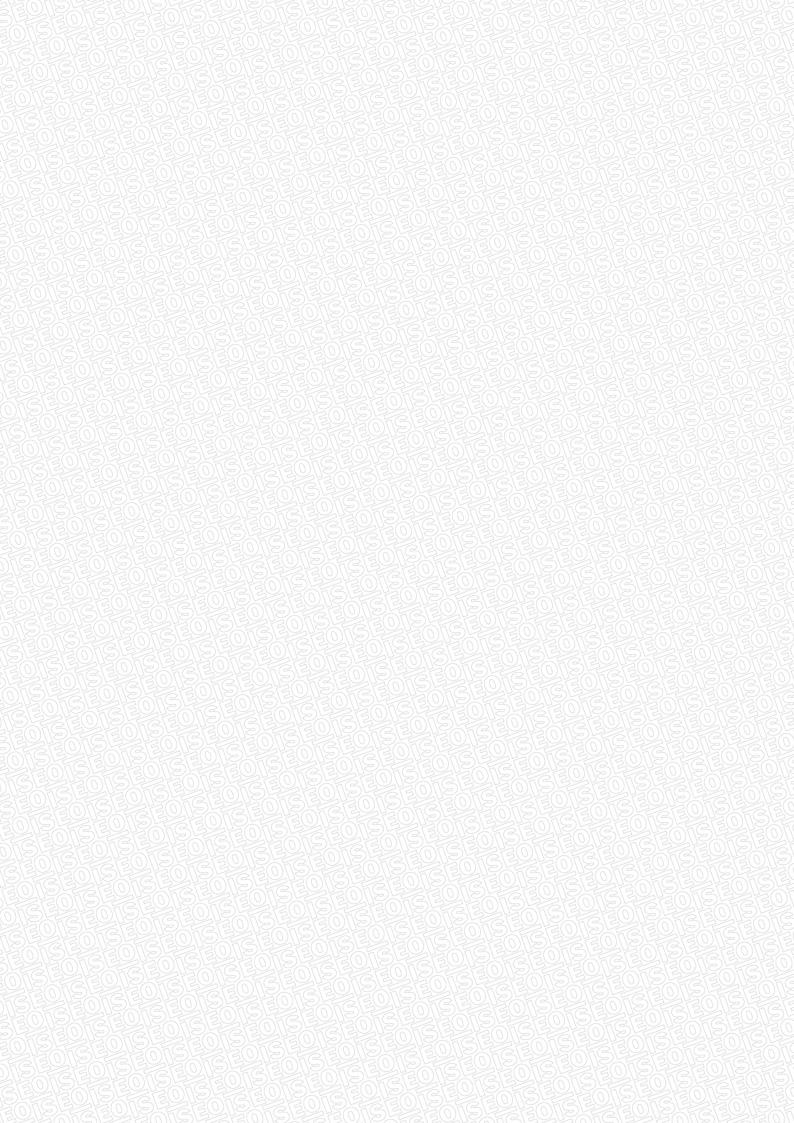

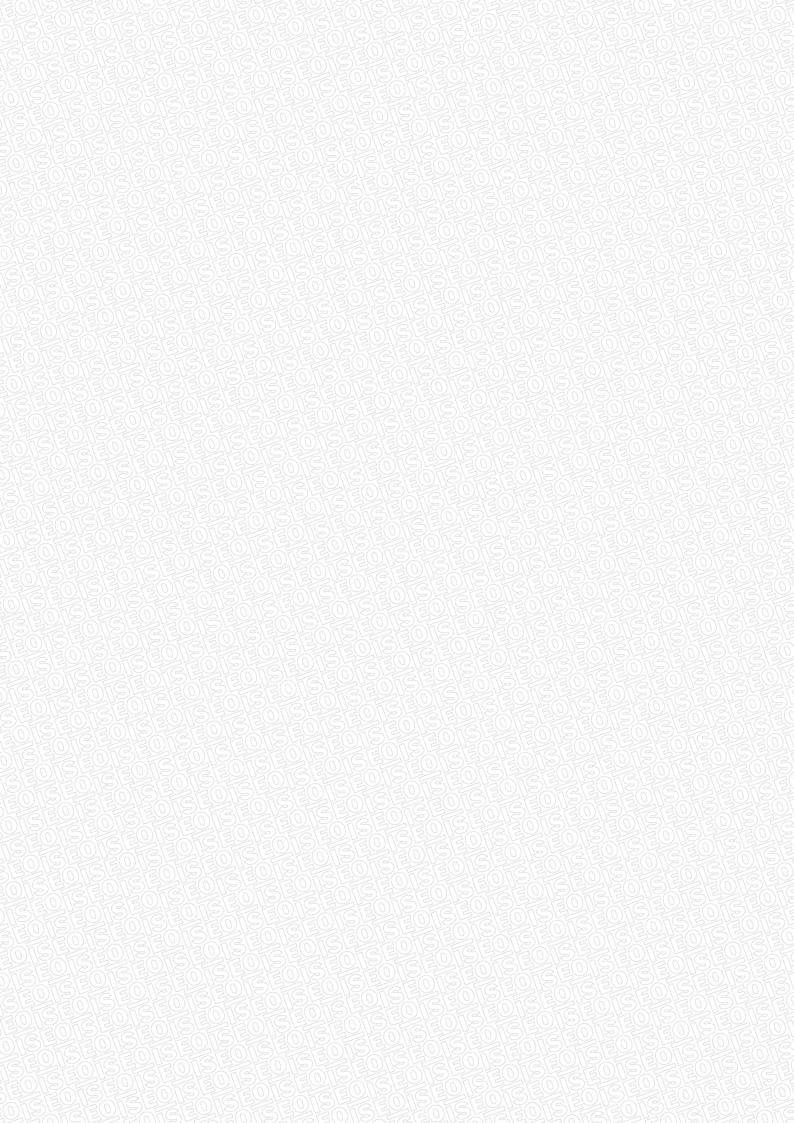

Doors opening direction

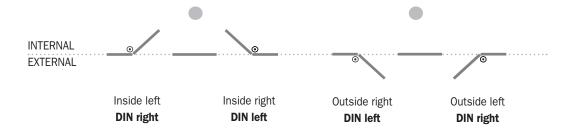

Use Instructions

To lubrificate the cylinder use only teflon Interflon Finlube TF.



When assembling, make sure drillings and filings do not enter the lock.



Do not paint the lock front plate, since this may cause damages to the deadbolt and the latchbolt.



Fixing screws must not cause damage to the product.



For installation, carefully follow the user's instructions or call skilled staff.



To install the lock exclusively use the transformers recommended in the instructions.





www.**iseo**.com

Iseo Serrature s.p.a.

- Via San Girolamo 13 25055 Pisogne (BS) - Italy ☎ +39 0364 8821 Fax +39 0364 882263 iseo@iseo.com
- Via Don Fasola, 4 22069 Rovellasca (CO) - Italy ☎ +39 02 96740420 Fax +39 02 96740309 info.fiam@iseo.com

Iseo France s.a.s.
Zone Industrielle
1111, rue du Maréchal Juin
CS 90367 Vaux Le Pénil
77006 Melun Cédex - France

+33 1 64835858
Fax +33 1 64879685
city.iseofrance@iseo.com

Iseo Middle East F.Z.E.
PO. Box 61390
Jebel Ali, Dubai
United Arab Emirates
19 714 2957220
Fax +9 714 2957166
iseome@emirates.net.ae

Via della Meccanica 23 41018 San Cesario s.P. (MO) Italy 439 059 927948 5ay +39 059 927972

Fax +39 059 927972 info.olso@iseo.com

Olso Meccanica s.r.l.

Feroneria Prod S.A.
Calea 6 Vânatori 51-53
310162 Arad (AR) - România
♣ +40 257 250 225
Fax +40 257 257 127
feroneria@iseo.com

Iseo Asia Pacific Sdn Bhd 15-21 Jalan 22 Taman Bukit Kuchai 47190 Puchong, Selangor D.E Malaysia 4 +603 8075 3331

Fax +603 8075 9333 info@iseo.com.my

Iseo Deutschland GmbH
Wiesestraße 190
07548 Gera - Germany

★ +49 365 73620
Fax +49 365 7362135
info.iseodeutschland@iseo.com

Cerraduras Iseo Ibérica S.L. C/ Las Marineras 2 28864 Ajalvir - Madrid - Spain 10 +34 91 8843200 Fax +34 91 8843003 iseo@iseoiberica.es

Iseo Projects and Access Control DMCC P.O. Box 336998 JLT Cluster T One Lake Plaza, Dubai United Arab Emirates +9 714 5136162 Fax +9 714 5576488 iseoprojects@iseo.com

Microhard s.r.l. Via Don Fasola, 4 22069 Rovellasca (CO) - Italy ☎ +39 02 96749084 Fax +39 02 73965117 info.mh@iseo.com

Iseo South Africa (Pty) Ltd Unit C2, Maitland Industrial Park 733 Voortrekker Road, Maitland 7405 Cape Town - South Africa 2 +27 21 593 0101 Fax +27 21 593 0110 sales@iseo.co.za

Iseo Beijing

Arch. Hardware Co.Ltd.
Room 1001 Bldg 11 Jianwai Soho
39 East 3RD Ring Road
Chaoyang District - Beijing
PR. China 100021
+86 10 5869 8079

Fax +86 10 5869 4282 admin.cn@iseoasia.com

Iseo Colombia s.a.s. Calle 122 # 19A - 55 110111 Bogotà - Colombia \$\frac{1}{2} +57 1 807 7712 Fax +57 1 807 7713 info.iseocolombia@iseo.com

